

High Frequency Ultra-low Jitter Voltage Controlled Crystal Oscillators [Quick - Turn VCXO , 15 ~ 2,100 MHz]

G_JFN

CMOS / Differential

**Quick - Turn
Clock Oscillators**

**150 fsec
RMS Jitter**

SMD

1.8 V

2.5 V


3.3 V

Min.
15 MHz

Max.
2,100 MHz

Features

- High Frequency Range : 15 ~ 2,100 MHz
- Ultra-low RMS Jitter : 150 fsec (typ.) @ 3.3 V , 156.250 MHz
- Package Size : 5.0 x 3.2mm and 7.0 x 5.0mm
- Next-Day sample for Prototypes



General specifications , at Ta=+25°C

Model	GTJFN	GPJFN	GDJFN	GCJFN	GQJFN
Output Logic	CMOS	LVPECL	LVDS	HCSL	CML
Supply Voltage V _{DD}	+ 1.8 V ± 5%	---	+ 1.8 V ± 5% (*1)	+ 1.8 V ± 5%	+ 1.8 V ± 5%
	+ 2.5 V ± 10%	+ 2.5 V ± 10%	+ 2.5 V ± 10%	+ 2.5 V ± 10%	+ 2.5 V ± 10%
	+ 3.3 V ± 10%	+ 3.3 V ± 10%	+ 3.3 V ± 10%	+ 3.3 V ± 10%	+ 3.3 V ± 10%
Available Frequency Range	15 ~ 250 MHz	15 ~ 2,100 MHz	15 ~ 2,100 MHz	15 ~ 700 MHz	15 ~ 2,100 MHz
Output Load	15pF (max.)	50 Ω into V _{DD} - 2V or Thevenin equivalent	100 Ω between OUT and OUTN	50 Ω to GND	50 Ω to V _{DD}
Output Logic " High " , " 1 "	V _{DD} - 0.4 V (min.)	V _{DD} - 1.165 V (min.) V _{DD} - 0.8 V (max.)	V _{DD} : 1.4 V (typ.) V _{DD} : 1.6 V (max.)	V _{DD} : 0.66 V (min.) V _{DD} : 1.15 V (max.)	V _{DD} - 0.085 V (min.) V _{DD} = (max.)
Output Logic " Low " , " 0 "	V _{DD} × 0.1 V (max.) 0.3V (max.) for 1.8V only	V _{DD} - 2.0 V (min.) V _{DD} - 1.55 V (max.)	V _{DD} : 1.1 V (typ.) V _{DD} : 0.9 V (min.)	V _{DD} : - 0.15 V (min.) V _{DD} : 0.15 V (max.)	V _{DD} - 0.6 V (min.) V _{DD} - 0.32 V (max.)
Output Voltage Swing	---	595 mV (min.) 930 mV (max.)	250 mV (min.) 450 mV (max.)	450 mV (min.) 700 mV (typ.)	200 mV (min.) 600 mV (max.)
Current Consumption (V _{DD} = + 3.3 V)	75 mA (typ.) 90 mA (max.)	100 mA (typ.) 120 mA (max.)	75 mA (typ.) 90 mA (max.)	80 mA (typ.) 100 mA (max.)	70 mA (typ.) 85 mA (max.)
Current with Output Disabled	62 mA (typ.)	99 mA (typ.)	74 mA (typ.)	79 mA (typ.)	69 mA (typ.)
Rise Time / Fall Time (20% to 80% Waveform)	5.0 nsec (max.) (10% to 90% Waveform)	0.4 nsec (max.)	0.4 nsec (max.)	0.4 nsec (max.)	0.4 nsec (max.)
RMS Jitter [12 KHz ~ 20 MHz]	156.250 MHz : 159 fsec (typ.) ; 491.520 MHz : 155 fsec (typ.) ; 644.530 MHz : 151 fsec (typ.) ; 2.000 MHz : 163 fsec (typ.)				
Frequency Stability Codes	Frequency Stability Over Operating Temperature Range		± 25 ppm	± 50 ppm	± 100 ppm
	Commercial (-20°C to +70°C)		A	B	C
	Industrial (-40°C to +85°C)		D	E	F
	Extended Industrial (-40°C to +105°C)		---	H	J
Duty Cycle	50 % ± 5% ; 50 % ± 10% for CMOS 1.8V only				
Start-up Time	5 msec. (typ.) ; 10 msec. (max.)				
Aging at Ta = +25°C	± 3 ppm (max.) for first year ; ± 2 ppm (max.) per year thereafter				
Storage Temperature	-55°C to +150°C				
Control Voltage Function on Pad 1					
Vcontrol Center	+ 0.9 V for V _{DD} = + 1.8 V		+ 1.25 V for V _{DD} = + 2.5 V	+ 1.65 V for V _{DD} = + 3.3 V	
Vcontrol Range	+ 0.0 V ~ + 1.8 V		+ 0.25 V ~ + 2.25 V		+ 0.3 V ~ + 3.0 V
Frequency Pulling Range	± 100 ppm (min.)		± 100 ppm (min.)		± 100 ppm (min.)
	± 200 ppm (available)		± 200 ppm (available)		± 200 ppm (available)
Linearity	1% (typ.) ; 10% (max.)				
Transfer Function	Positive Transfer				
Input Impedance	5 MΩ (min.)				
Bandwidth	10 KHz (typ.) Measured at -3 dB				
Output Enable Function on Pad 2					
Output Enable / Disable Function	80% of V _{DD} (min.) to enable output.				
	20% of V _{DD} (max.) to disable output.				
Output Enable Time / Disable Time	2.5 msec (max.) / 10 usec (max.)				

Note * 1 : This needs AC coupling (100-nF series capacitor). Please check the test circuit.

G_JFN

CMOS / Differential

Quick - Turn
Clock Oscillators

150 fsec
RMS Jitter

SMD

1.8 V

2.5 V

3.3 V

Min.

15 MHz

Max.

2,100 MHz

Part Number Format and Example

Example : 3GPJFN578-E-150N-644.530

3	G	P	JFN578	-	E	-	150N	-	644.530
Supply Voltage Code : "3" for 3.3V "25" for 2.5V "18" for 1.8V	"G" : for Voltage Controlled Crystal Oscillators	Output Code : "T" : COMS "P" : LVPECL "D" : LVDS "C" : HCSL "Q" : CML	"JFN" : Product Series "578" : Package Code 7.0 * 5.0 _ 8 Pad "538" : Package Code 5.0 * 3.2 _ 8 Pad	-	Freq. Stability Code : "E" : ± 50 ppm over -40 to +85 C Other frequency stabilities are available.	-	Freq. Pulling Range : "150" : ± 150 ppm "M" : Maximum "N" : Minimum "T" : Typical	-	Frequency (MHz)

Outline Dimensions (Unit : mm) , Suggested pad Layout for SMDs

G_JFN578	G_JFN538
Top View 7.0 $\pm$ 0.2 5.0 $\pm$ 0.2 MEC Bottom View 1.4 1.0 3.7 1.2 5.08 1.3 4.2 5.7 5.08 1.3 2.0 1.8 1.4 Land pattern 1.8 1.4 2.0 5.08 5.7 1.3 4.2 Side View 1.7 $\pm$ 0.1	Top View 5.0 $\pm$ 0.2 3.2 $\pm$ 0.2 MEC Bottom View 0.6 0.6 2.1 0.7 2.54 0.9 0.6 0.6 0.7 Land pattern 0.84 0.8 1.2 2.54 4.1 0.8 2.2 Side View 1.4 $\pm$ 0.1

Pad Connections :

Pad 1 : Control Voltage	Pad 2 : Output Enable	Pad 3 : Ground	Pad 4 : CMOS : Output , Differential : Output
Pad 5 : CMOS : No Connection , Differential : Complementary Output	Pad 6 : Supply Voltage	Pad 7 , Pad 8 : Do Not Connect	


Test Circuits

CMOS Test Circuits	LVPECL Test Circuits	HCSL Test Circuits
	$V_{DD} = 3.3V$; $R1 = R3 = 127 \Omega$; $R2 = R4 = 82.5 \Omega$ $V_{DD} = 2.5V$; $R1 = R3 = 250 \Omega$; $R2 = R4 = 62.5 \Omega$	
CML Test Circuits	LVDS Test Circuits for 2.5V and 3.3V	LVDS Test Circuits for 1.8V only (*1)

Emboss Taping and Reel Specifications

[VCXO]

[(VC)TCXO]

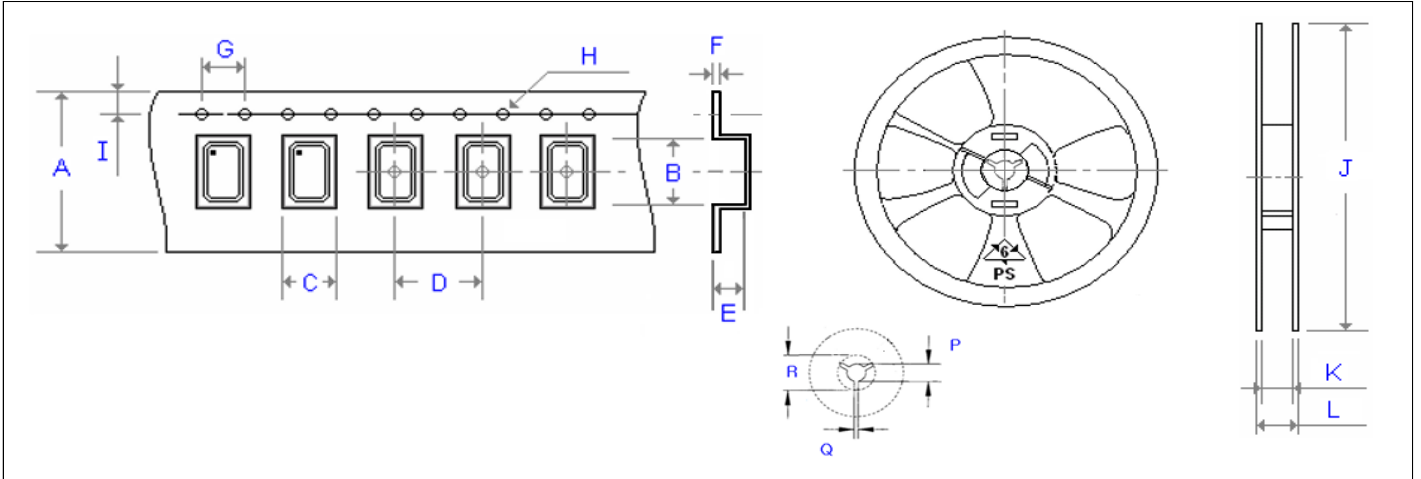

Carrier Type Dimensions (unit : mm) ±0.3mm

	A	B	C	D	E	F	G	H	I	pcs / reel
G_226	8.00	2.80	2.25	4.00	1.10	0.30	4.00	Ø 1.50	1.75	3000
G_326	8.00	3.40	2.70	4.00	1.40	0.25	4.00	Ø 1.50	1.75	3000
G_536	12.00	5.30	3.60	8.00	1.40	0.30	4.00	Ø 1.50	1.75	1000
G_576	16.00	7.30	5.30	8.00	1.90	0.30	4.00	Ø 1.50	1.75	1000
G_538	12.00	5.40	3.60	8.00	1.70	0.30	4.00	Ø 1.50	1.75	1000
G_578	16.00	7.30	5.30	8.00	1.90	0.30	4.00	Ø 1.50	1.75	1000
(V)M21	8.00	2.30	1.90	4.00	0.90	0.25	4.00	Ø 1.50	1.75	3000
ME21	8.00	2.30	1.50	4.00	1.35	0.25	4.00	Ø 1.50	1.75	3000
(V)M22	8.00	2.80	2.25	4.00	1.10	0.30	4.00	Ø 1.50	1.75	3000
(V)M_32	8.00	3.71	2.80	4.00	1.75	0.25	4.00	Ø 1.50	1.75	3000
(V)M_326	12.00	3.60	2.90	4.00	1.70	0.30	4.00	Ø 1.50	1.75	1000
(V)M_53	12.00	5.30	3.60	8.00	1.40	0.30	4.00	Ø 1.50	1.75	1000
(V)M_538	12.00	5.40	3.60	8.00	1.70	0.30	4.00	Ø 1.50	1.75	1000
(V)M_57(2)	16.00	7.40	5.50	8.00	2.80	0.35	4.00	Ø 1.50	1.75	500
(V)M_43 (63)	24.00	11.80	10.00	16.00	5.00	0.30	4.00	Ø 1.50	1.75	500

Reel Dimensions (unit : mm) +2.0 / -0.0mm

	J	K	L	P	Q	R	pcs / reel
G_226	180.00	9.00	12.00	13.20	2.10	-	3000
G_326	180.00	9.00	12.00	13.20	2.10	-	3000
G_536	180.00	13.00	16.00	13.20	2.50	-	1000
G_576	180.00	17.20	19.30	13.30	2.20	22.00	1000
G_538	180.00	13.00	16.00	13.20	2.50	-	1000
G_578	180.00	17.20	19.30	13.30	2.20	22.00	1000
(V)M21	180.00	9.00	12.00	13.20	2.10	-	3000
ME21	180.00	9.00	12.00	13.20	2.10	-	3000
(V)M22	180.00	9.00	12.00	13.20	2.10	-	3000
(V)M_32	180.00	9.00	12.00	13.20	2.10	-	3000
(V)M_326	180.00	13.00	16.00	13.20	2.50	-	1000
(V)M_53	180.00	13.00	16.00	13.20	2.50	-	1000
(V)M_538	180.00	13.00	16.00	13.20	2.50	-	1000
(V)M_57(2)	180.00	17.20	19.30	13.30	2.20	22.00	500
(V)M_43 (63)	330.00	24.50	29.10	13.00	2.20	17.30	500