

Superb phase noise differential oscillators

Differential

HPEK

LVPECL

HDEK

LVDS

HCEK

HCSL

SMD

2.5 V

3.3 V

Min.


13.5 MHz

Max.

220 MHz

Features

- Noise improved version for H_EK-series
- Femtosecond integrated phase jitter (98 fs typical , 12 KHz to 20 MHz)
- Superior phase noise (-149 dBc/Hz at 100 KHz and -157 dBc/Hz at 10 MHz offset)



General specifications , at Ta=+25°C

Model	HPEK		HDEK			HCEK	
Output Logic	LVPECL		LVDS			HCSL	
Available Frequency Range	13.5 MHz ~ 60 MHz		13.5 MHz ~ 60 MHz			13.5 MHz ~ 60 MHz	
	90 MHz ~ 220 MHz		90 MHz ~ 220 MHz			90 MHz ~ 220 MHz	
Supply Voltage (V _{DD})	---		+ 2.5 V ± 10%			+ 2.5 V ± 10%	
	+ 3.3 V ± 10%		+ 3.3 V ± 10%			+ 3.3 V ± 10%	
Output Load	50 Ω into V _{DD} - 2.0V or Thevenin equivalent		100 Ω between output and complimentary output			50 Ω to ground on each output	
Rise Time / Fall Time (20%↔80% of waveform)	0.2 nsec (typ.) 0.4 nsec (max.)		0.2 nsec (typ.) 0.4 nsec (max.)			0.5 nsec (typ.) 0.8 nsec (max.)	
Current Consumption	38 mA (typ.) , 60 mA (max.)		15 mA (typ.) , 35 mA (max.)			32 mA (typ.) , 40 mA (max.)	
Output Logic " High " , " 1 "	V _{DD} - 1.03 (min.) , V _{DD} - 0.88 (max.)		1.4 V (typ.) , 1.6 V (max.)			0.5 V (min.) , 0.9 V (max.)	
Output Logic " Low " , " 0 "	V _{DD} - 1.81 (min.) , V _{DD} - 1.62 (max.)		0.9 V (min.) , 1.1 V (typ.)			- 0.15 V (min.) , 0.15 V (max.)	
Output Swing (single-end)	400 mV (min.)		250 mV (min.)			500 mV (min.)	
Frequency Stability Codes	Frequency Stability over Operating Temperature Range		± 25 ppm	± 50 ppm	± 100 ppm	If non-standard , please enter the desired stability after the " C " or " F " represents .	
	Commercial (-2 0°C to +70°C)		A	B	C	For example : " C20 " ± 20 ppm over -20°C to +70°C ; " F30 " ± 30 ppm over -40°C to +85°C	
	Industrial (-40°C to +85°C)		D	E	F		
Start-up Time	1.0 msec. (typ.) , 5.0 msec (max.)						
Duty Cycle	50% ± 5%						
Storage Temperature	-55°C to +150°C						
Aging at Ta = +25°C	± 3 ppm (max.) first year						
RMS Jitter	Freq. output < 100MHz : 350 fsec (typ.) , [50MHz , 3.3V , LVDS]						
(12 KHz to 20 MHz)	Freq. output > 100MHz : 98 fsec (typ.) , [156.250MHz , 3.3V , LVDS]						
Phase Noise [dBc / Hz (typ.)]	Offset	100 Hz	1 KHz	10 KHz	100 KHz	1 MHz	10 MHz
	50 MHz	-104	-134	-147	-153	-152	-157
	156.250 MHz	-93	-123	-140	-149	-152	-157
Output Enable / Disable Function	Enable	70% (min.) of V _{DD} to enable output. Enable time : 5 msec (max.)					
	Disable	30% (max.) of V _{DD} to disable output. Disable current : 10 uA (max.) [OE ≤0.3V] , Disable time : 0.2 usec (max.)					

Crystal Oscillators

HP_ [LVPECL Differential] HD_ [LVDS Differential] HC_ [HCSL Differential] HCL_ [LPHCSL Differential]

Part Number Format and Example

[1]	[2]	[3]	-	[4]	-	[5]
Supply Voltage	Holder Type	1 or 2		Frequency Stability		Center Frequency

Example	(1)	25	HCK536	1	-	C15	-	125.000
	(2)	18	HDJK576	2	-	D	-	156.250

Ex (1) : 25HCK5361 - C15 - 125.000 [+2.5V , HCK type , HCSL output , 5.0 x 3.2 mm size , OE on pad 1 , ±15 ppm from -20°C to 70°C , 125.000MHz]

Ex (2) : 18HDJK5762 - D - 156.250 [+1.8V , HDJK type , LVDS output , 7.0 x 5.0 mm size , OE on pad 2 , ±25 ppm from -40°C to 85°C , 156.250MHz]


[1]	Supply voltage , " 18 " for +1.8V ; " 25 " for +2.5V ; " 3 " for +3.3V	
[2]	Holder Type	
[3]	" 1 " : OE function on pad # 1 , " 2 " : OE function on pad # 2	
[4]	-20°C ~ 70°C	" A " ± 25ppm ; " B " ± 50ppm ; " C " ± 100ppm ; If non-standard please enter the desired stability after " C " , for example " C15 " : represents ±15ppm over -20 to +70°C
	-40°C ~ 85°C	" D " ± 25ppm ; " E " ± 50ppm ; " F " ± 100ppm ; If non-standard please enter the desired stability after " F " , for example " F30 " : represents ± 30ppm over -40 to +85°C
[5]	Frequency in MHz	

Outline Dimensions (Unit : mm) , Suggested pad Layout for SMDs , Test Circuits

H_K226 			H_K326 		
H_K536 			H_K576 		
LVPECL Test Circuit 			LVDS Test Circuit 		
HCSL Test Circuit 			LPHCSL Test Circuit for HCLK only 		

Emboss Taping and Reel Specifications

[Crystal Oscillator Units]

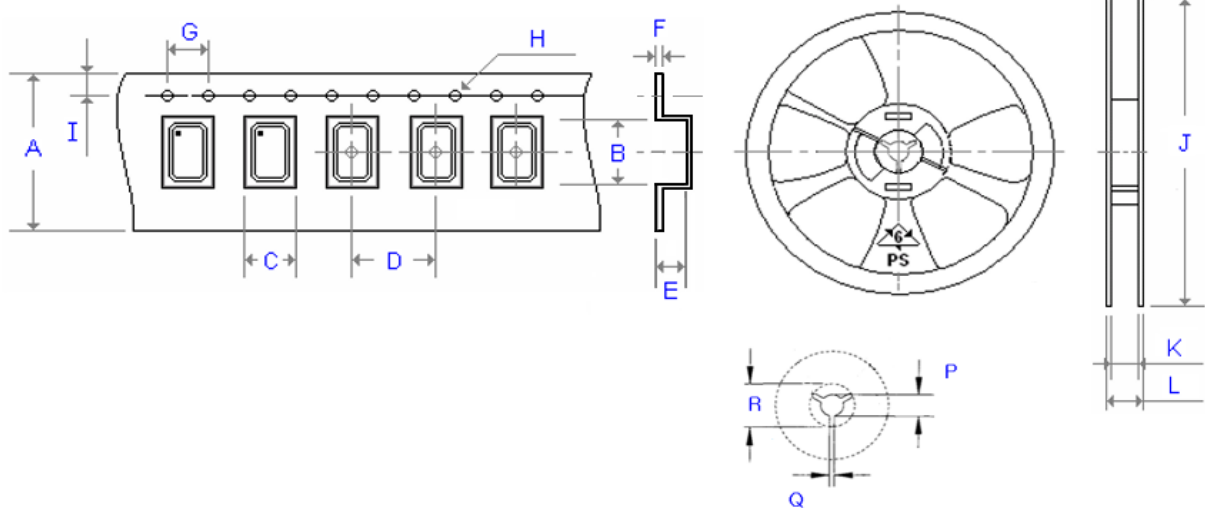

Carrier Type Dimensions (unit : mm) $\pm 0.3\text{mm}$

	A	B	C	D	E	F	G	H	I	pcs / reel
H21	8.00	2.30	1.90	4.00	0.90	0.25	4.00	Ø 1.50	1.75	3000
H_22	8.00	2.80	2.25	4.00	1.10	0.30	4.00	Ø 1.50	1.75	3000
H_32	8.00	3.40	2.70	4.00	1.40	0.25	4.00	Ø 1.50	1.75	3000
H_53	12.00	5.30	3.60	8.00	1.40	0.30	4.00	Ø 1.50	1.75	1000
H_57	16.00	7.30	5.30	8.00	1.90	0.30	4.00	Ø 1.50	1.75	1000
SWO	16.00	7.20	5.40	8.00	1.80	0.30	4.00	Ø 1.50	1.75	1000
H_216	8.00	2.30	1.90	4.00	0.90	0.25	4.00	Ø 1.50	1.75	3000
H_226	8.00	2.80	2.25	4.00	1.10	0.30	4.00	Ø 1.50	1.75	3000
H_326	8.00	3.40	2.70	4.00	1.40	0.25	4.00	Ø 1.50	1.75	3000
H_536	12.00	5.30	3.60	8.00	1.40	0.30	4.00	Ø 1.50	1.75	1000
H_576	16.00	7.30	5.30	8.00	1.90	0.30	4.00	Ø 1.50	1.75	1000
H_328	8.00	3.40	2.70	4.00	1.40	0.25	4.00	Ø 1.50	1.75	3000
H_538	12.00	5.40	3.60	8.00	1.70	0.30	4.00	Ø 1.50	1.75	1000
H_578	16.00	7.30	5.30	8.00	1.90	0.30	4.00	Ø 1.50	1.75	1000
H_43	24.00	11.80	10.00	16.00	5.00	0.30	4.00	Ø 1.50	1.75	500

Reel Dimensions (unit : mm) $+2.0 / -0.0\text{mm}$

	J	K	L	P	Q	R	pcs / reel
H21	180.00	9.00	12.00	13.20	2.10	-	3000
H_22	180.00	9.00	12.00	13.20	2.10	-	3000
H_32	180.00	9.00	12.00	13.20	2.10	-	3000
H_53	180.00	13.00	16.00	13.20	2.50	-	1000
H_57	180.00	17.20	19.30	13.30	2.20	22.00	1000
SWO	180.00	17.20	19.30	13.30	2.20	22.00	1000
H_216	178.00	8.40	11.40	13.30	2.50	20.50	3000
H_226	180.00	8.40	11.40	13.20	2.10	-	3000
H_326	180.00	9.00	12.00	13.20	2.10	-	3000
H_536	180.00	13.00	16.00	13.20	2.50	-	1000
H_576	180.00	17.20	19.30	13.30	2.20	22.00	1000
H_328	180.00	8.00	12.00	13.20	2.10	-	3000
H_538	180.00	13.00	16.00	13.20	2.50	-	1000
H_578	180.00	17.20	19.30	13.30	2.20	22.00	1000
H_43	330.00	24.50	29.10	13.00	2.20	17.30	500